


## Steel Wire Braid Protected LSZH Category 5e UTP

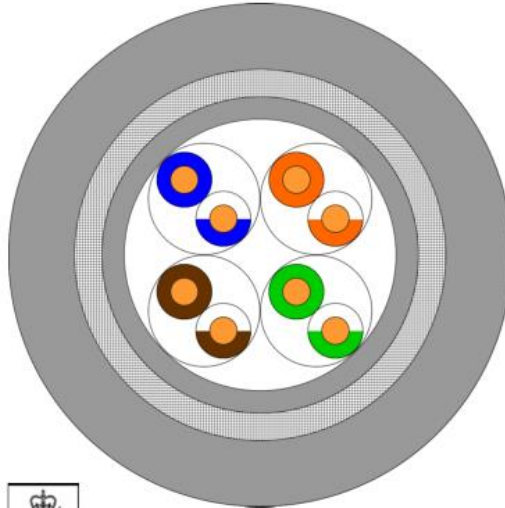

Design:	Nominal Diameter (mm)
<b>Conductor:</b> Solid Bare Copper Wire (AWG24)	
<b>Insulation:</b> Solid Polyethylene	
<b>Twisting:</b> 2 Cores Paired Up	
<b>Cable Layup:</b> 4 Pairs Laid Up	
<b>Screen:</b> Ind. & Overall PET/ Al-Laminated Foil	
<b>Inner Sheath:</b> Flame Retardant LSZH	4.80
<b>Armour:</b> Galvanised Steel Wire Braid	5.80
<b>Outer Sheath:</b> Flame Retardant LSZH (Grey)	8.20

Flame retardant to IEC 60332-3-22 (Cat. A)

Non-Corrosive to IEC 60754-2

Low Smoke to IEC 61034

### Applicable Standards

TIA/EIA 568-B.2

ISO/EIC 11801 2<sup>nd</sup> Edition, IEC 61156-5

EN50173-1, EN50288-3-1

**Paragon Part Number:** 5LSUTP-EXT-SOLSWB

Supplied by the metre