


Steel Wire Armour Protected LSZH Category 6 F/FTP 450MHz

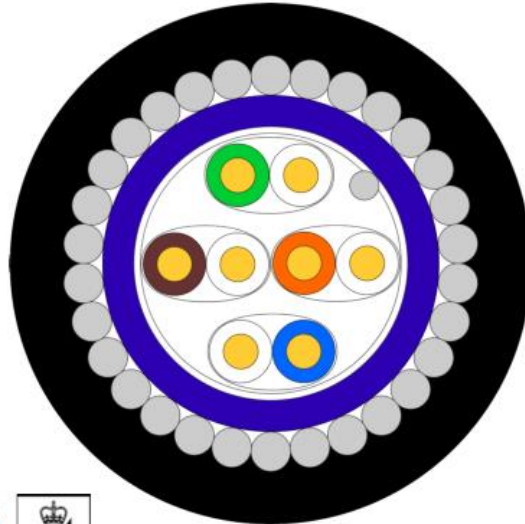

Design:	Nominal Diameter (mm)
Conductor: Bare Copper Wire (AWG23)	0.56
Insulation: Solid Polyethylene	1.20
Twisting: 2 Cores Paired Up	2.40
Cable Layup: 4 Core Laid Up	
Screen: Ind. & Overall PET/ Al-Laminated Foil	
Inner Sheath: Flame Retardant LSZH	7.20
Armour: Galvanised Steel Wire Armour	8.94
Outer Sheath: Flame Retardant LSZH (Black)	11.74

Flame retardant to IEC 60332-3-22 (Cat. A)

Non-Corrosive to IEC 60754-2

Low Smoke to IEC 61034

Applicable Standards

EIA/TIA 568-B.2-1

ISO/EIC 11801 2nd ed; IEC 61156-5

EN50173; EN50288-5

Paragon Part Number: 6LSF/FTP-EXT-SOLSWA

Supplied by the metre